


Iwatsu Omega924 System


To Enter Programming Mode (from Ext-100):

- Press Feature # *
- Default Password is: **000000**
- Press **SHOW** to enter programming

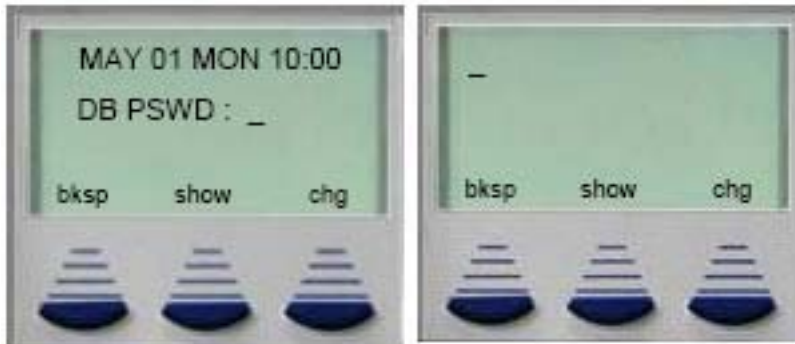

To Set Time / Date:

- Enter **415**, the display will show 4-15.

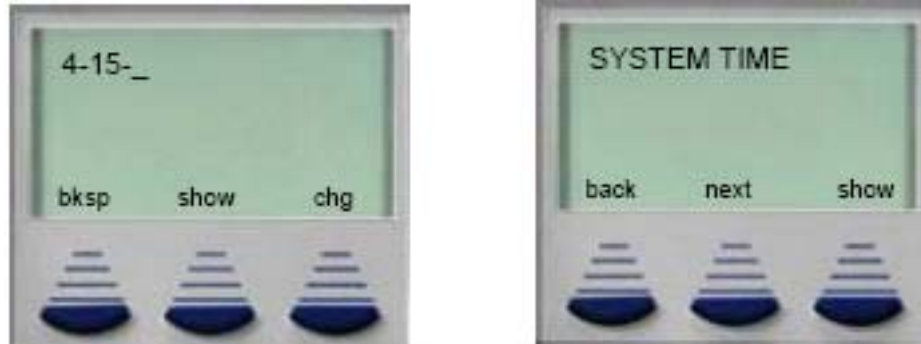

- Press **SHOW**
- Use the **BACK** and **NEXT** keys to navigate to the setting to be changed:
 - Year
 - Month
 - Day
 - Weekday
 - Hour
 - Minute
- For the settings of Year, Day, Hour, and Minute, you must press **CHG** and then input the data using the dial pad and then press **SAVE**.
- For the settings of Month and Weekday, press **CHG** until the desired value is displayed.
- When complete – lift the handset and hang-up, this will exit programming mode.